

SELECON

PRODUCT DATA SHEET

Pacific

40° FIXED BEAM

A base down 575W / 750W / 1000W axial ellipsoidal which delivers a "cool" beam of light in a range of fixed beams including 20, 30, 40, 50 degrees. The beam is of crisp "white" light with little or no distortion, ideal for pattern projection and precise beam shaping.


An energy efficient fixture with Active Heat Management system delivers longer life for filters, shutters and lower energy consumption.

A fully featured fixture constructed from aluminum pressure die castings and injection moulded Fortron plastic components.

FEATURES

- Cool 'white' light. Over 80% of the heat is removed from the light beam by the cold mirror and dissipated through the heat-sink.
- Base down lamp mounted axially in the reflector to maximize light collection.
- Choice of 575W; 750W or 1000W; MSR 575W; 70W/150W CDM / CMH lamp modules.
- Accurate & easy to use lamp peak/ flat adjustment.
- Two pattern/ iris mounting positions.
- Automatic disconnection of power on removal of lamp module. ETL / cETL listed to UL 1573.
- Height adjustable yoke.


PHOTOMETRIC DATA

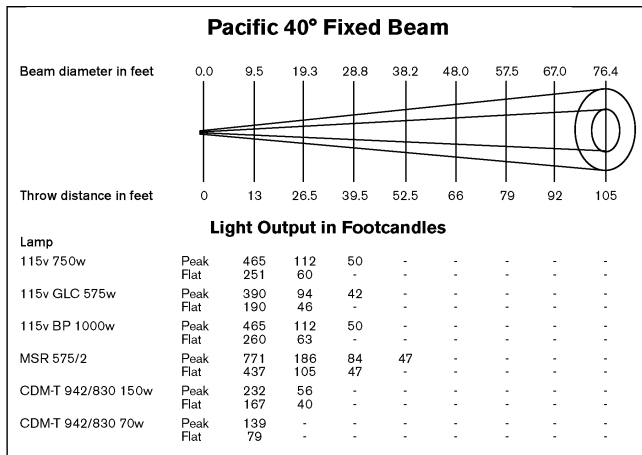

Tests conducted using standard available lamps.



PHYSICAL DATA

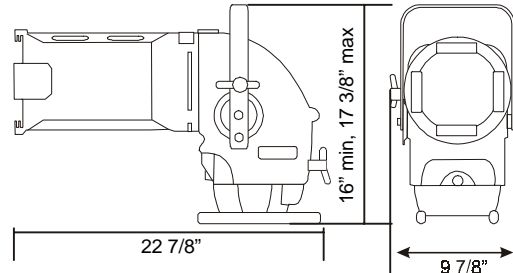

Weight: 18 lb 8 oz
 Carton Size: 25 1/2" x 15 3/4" x 10 5/8"
 Color Frame Size: 6 1/8" x 6 1/8" square
 Gobo Size: A Size, 3" diameter image
 Gobo Holder Width: 4 3/4"
 Included: 1 x color frame, 1 x heat sink guard, suspension bolt set, instruction sheet.

ORDER CODES & ACCESSORIES

Pacific Fixed Beam body, No Lens 575W/750W 18PACFB/6
 Pacific Fixed Beam body, No Lens, 1000W 18PACFB/1
 Pacific Fixed Beam, Hot Restrike 575W MSR lamp module 18PACFB/MSRHR
 Pacific Fixed Beam, CDM 150W/70W lamp module 18PACFB/CDM
 Pacific 20° Lens Assembly 18PACL20
 Pacific 30° Lens Assembly 18PACL30
 Pacific 40° Lens Assembly 18PACL40
 Pacific 50° Lens Assembly 18PACL50
 Pacific Gobo Holder, 'A' Size 19PACGHA
 Pacific Spare Color Frame 19PACCF
 Pacific Iris 19PACIRIS
 Pacific Lens Safety Mesh 19PACSMFB
 Safety Bond 20SC

LAMPS

115V GLC 575W, 15,500 lumens, 400 hours average life
 115V GLA 575W, 13,500 lumens, 1500 hours average life
 115V GLD 750W, 18,600 lumens, 400 hours average life
 115V GLE 750W, 1500 hours average life
 115V GAC 1000W Blue Pinch, 27,000 lumens, 250 hours average life

Selecon reserves the right to change the specifications without notice (07/03)

SELECON, THE ONLY MANUFACTURER TO OFFER A LIMITED THREE YEAR WARRANTY ON ENTERTAINMENT PRODUCTS
www.seleconlight.com/english/support/warranty.html