SELECON

PRODUCT DATA SHEET

ACCLAIM

FRESNEL

A general purpose Fresnel for theatre, small studio and display lighting. The adjustable cone of light has a soft edge, easily blended with adjacent beams to provide even illumination. Fully featured fixture constructed of pressure die-castings and aluminum extrusion. The Acclaim Fresnel offers efficiency, strength and performance using a 4 ¼" diameter lens.

FEATURES

- Wide range of beam angle from 6 to 60 degrees.
- Adjustable yoke balance point.
- 'Swing-down' door for easy access to lamp or cleaning. Isolates the mains supply when opened.
- Captive lamp / reflector focus system moves on brass bearing provides smooth focus movement.
- Rear grab-handle doubles as handy cable storage.
- Automatic disconnection of power on removal of lamp module. ETL / cETL listed to UL 1573.

PHOTOMETRIC DATA

Tests conducted using a standard FRK, 650W, 120V lamp.

Beam angles:

Spot 6°	72,500 cd	Flood 60°	7,500 cd
Field:	14°		70°

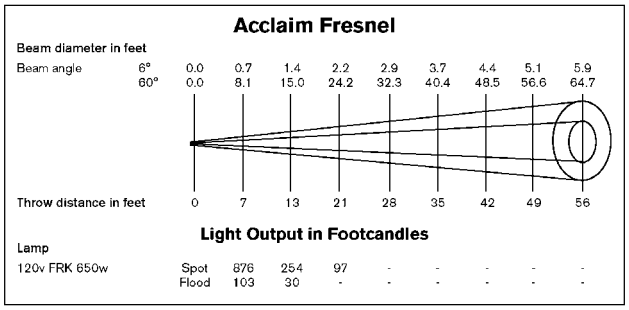

PHYSICAL DATA

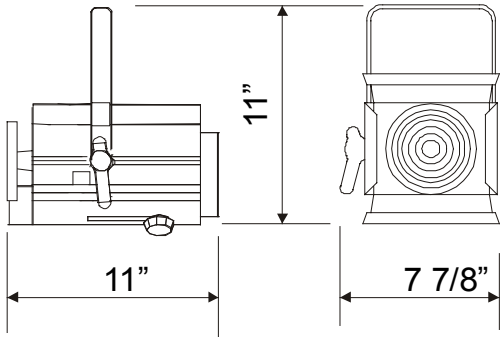

Weight:	6 lb 3 oz
Packed Weight:	7 lb
Carton Size:	16 ½" x 8 6/8" x 7"
Carton Size Cubic:	0.016
Colour Frame Size:	4 7/8" x 4 7/8" square
Included:	1 x color frame, 1 suspension bolt set, instruction sheet.

LAMPS: 120V

650W	FRK	16,900 lumens	200hrs average life
650W	FRE	15,000 lumens	400hrs average life

ORDER CODES & ACCESSORIES

Acclaim Fresnel	12ACFMS
Barndoor	20BDMF
Lens Safety Mesh	15ACSM
Safety Bond	20SC

Selecon reserves the right to change the specifications without notice (02/05).

SELECON, THE ONLY FIXTURE MANUFACTURER TO OFFER A LIMITED THREE YEAR WARRANTY ON ENTERTAINMENT PRODUCTS: www.seleconlight.com/english/support/warranty.html

© 2004 Selecon New Zealand Limited. All Rights Reserved.